

SD LINE



Specialized in the production and sales
of paint spray booths, mixing rooms and preparation areas




paint
spray
booths



The excellent performance of the MILLIBAR-SDLINE spraybooth depends essentially on 3 elements:

- Specific air volume calculated on the booth dimensions
- Booth pressure maintained constant at around "0" pa
- Section and position of the air intake in the filtering plenum proportioned to the size of the booth and to the height of the rear air suction wall

The perfect combination of these 3 elements allows Millibar to obtain an even, regular air flow without any turbulent areas
The performance obtained in this way is not even comparable to those old semi-downdraft spraybooths present on the market or known up to now

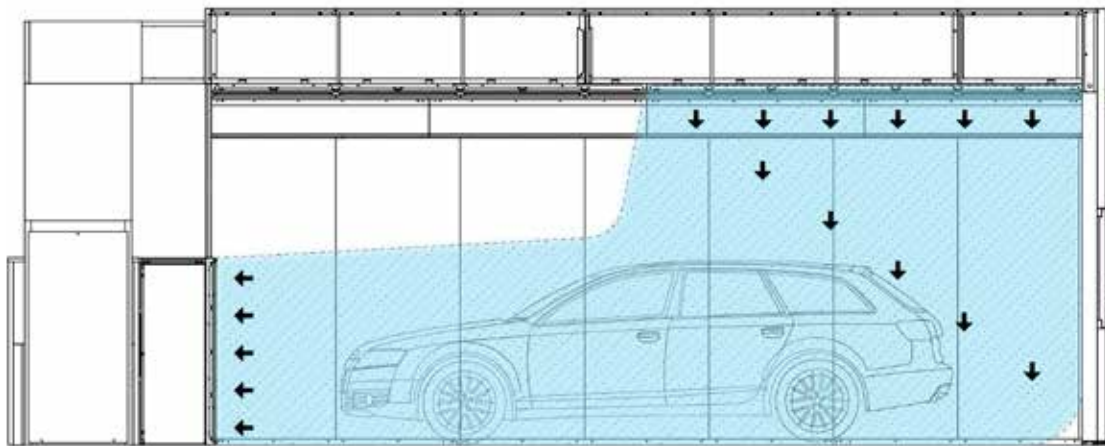

Explanatory drawing showing the air flow movement

Other unique Feature for high performances with low energy consumptions:

- ✓ Partial warm air recirculation in bake mode to obtain temperature uniformity
- ✓ Inverter on exhaust motor to adjust pressure inside the spraybooth

MOREOVER

No need of pit excavations

No need of metal basement and ramps



Via della Metallurgia, 14 (1st floor)
Tel. +39 045 8511220

37139 Verona - Italy
Fax +39 045 8519211

info@millibar.it
www.millibar.it